



TRUST


Product sheet

T035 -03,13,36,69,314,315,411 (35W)

T070 -03,13,36,69,314,315,411 (70W)

T150 -03,13,36,69,314,315,411 (150W)

The TRUST luminaire is well suited for both outdoor and indoor applications, especially in demanding environments such as harbours and heavy industry. It is exceptionally resistant to vibrations.

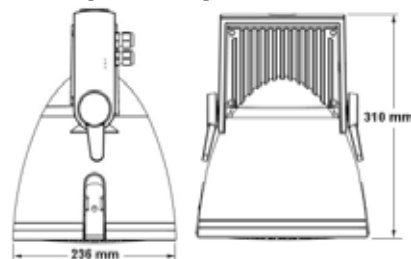

Material	Die-cast powder coated aluminium	
Effect	35W, 70W, 150W	
Ballast	Elektronic - Nuco	
Lightsource	HID-T/CDM-T (ceramic metall halogen)	
Dimensions	Diameter x Height = 236mm x 310mm	
Socket	G12	
Heat tolerance	40°C	
Volt	220-240V ~50/60Hz	
Power efficiency	0.95	
Cable area	0.75 mm ² minimum	
Mounting	Use the bracket with: 1 x Ø 10 mm bolt. Use with cable Ø 7-10mm	
Protection class	IP65	
Light source lifespan expectancy	16 000 - 20 000 h	
Ra-index	>90	
Colour temperature	4200°	
Weight	4 kg	
Burner position	Any	
Svivel range	180°	
Safety distance	Minimum 0.7 m	
Delivered fitted with	Electronic ballast 1 HID-T lightsource 942	
Options	Color filter (R/G/B) Polycarbonate lens-protection Power plug (on 3 m cable).	Wire hook Pole bracket
Available optics	-03 (3° round beam) -13 (15°x30°) -36 (30°x60°) -69 (60°x90°)	-314 (30°x140°) -115 (30°x155°) -411 (40°x110°)